



SISTEMA LUZ CONTINUA

CONTINUOUS LIGHTING SYSTEM

Módulos / Modules



TB 118	1x18W	680 mm	
TB 136	1x36W	1280 mm	
TB 158	1x58W	1580 mm	
TB 136.2	1x36W+1x36W	2560 mm	
TB 158.2	1x58W+1x58W	3160 mm	



Con equipo electromagnético A.F.
With HPF electromagnetic gear

DIFUSORES

DIFFUSERS


Difusor lamas / Louvre diffuser

TRE 18	18 W	540 mm
TRE 36	36 W	1140 mm
TRE 58	58 W	1440 mm



Difusor prismático / Prismatic diffuser


TDM 18	18 W	540 mm
TDM 36	36 W	1140 mm
TDM 58	58 W	1440 mm



OPCIONES

OPTIONS

Equipos electrónicos **EC** y regulables **ER**
Con incremento de medidas. Consultar
EC electronic gear and **ER** dimmer
Larger dimensions. Ask for details



[Módulos en perfil de aluminio.
Reflector recuperador de flujo en aluminio especular.
Difusor opcional rejilla lamas metálicas lacada en blanco o difusor policarbonato prismático.
Acabados en blanco]

[Aluminium profile modules.
Reflector in specular aluminium.
Optional louvre diffuser with white enamelled baffles or polycarbonate prismatic diffuser.
Finished in white]




ACCESORIOS


- TBC** Perfil Ciego metro lineal
Profile section linear metre
- TB-CD** Unión 90° / L-Joint
- TB-CD 135** Unión 135° / 135°-joint
- TB-TE** Unión «T» / T-joint
- TB-CZ** Unión «Cruz» / X-joint
- NL-UL** Unión Lineal para sistema luz continua
Linear joint for continuous lighting system
- TB-CF** Unión Flexible Sólo color negro
Flexible connector Available in black only
- TB-TF** Tapa Final / End cap
- TB-DI** Distanciador (140 mm) / Spacer (140 mm)

Suspensiones ver pág. 491 / *Suspensions see p. 491*

Medidas de planificación
Design dimensions

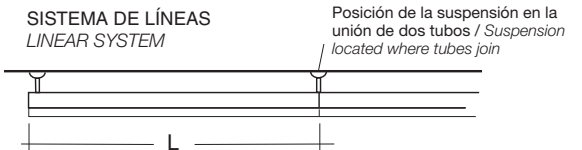

SISTEMA DE MALLAS / GRID SYSTEM

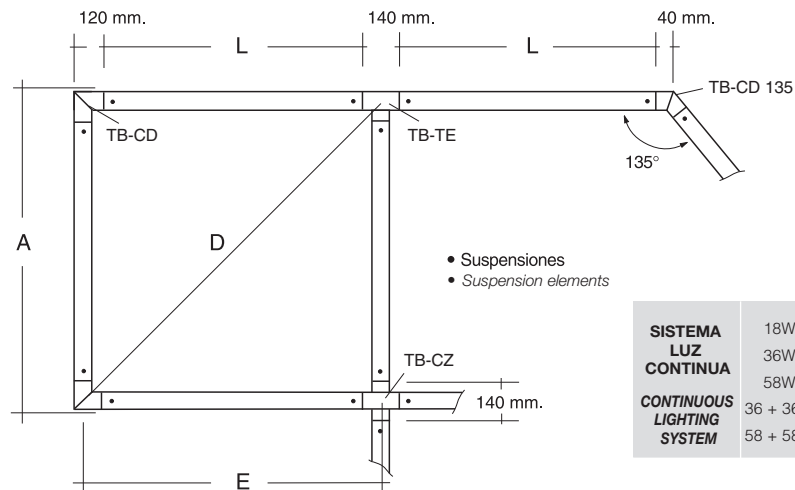

		L	A	E	D
SISTEMA LUZ CONTINUA	18W	680	920	820	1.160
	36W	1.280	1.520	1.420	2.008
	58W	1.580	1.820	1.720	2.432
CONTINUOUS LIGHTING SYSTEM	36 + 36W	2.560	2.800	2.700	3.818
	58 + 58W	3.160	3.400	3.300	4.667

Medidas en milímetros / Dimensions in millimetres

[Accesorios generales para estructurar el sistema en líneas o mallas mediante uniones diferentes en aluminio, tapas finales y de acoplamiento, suspensiones, etc. Acabados en blanco]

[A range of accessories for building continuous or grid systems, including a range of cast aluminium joints, end caps, suspension kits, etc. Finished in white]

Luminarias
Luminaire

Tuboline AT



LUMINARIAS DE SUPERFICIE

SURFACE-MOUNTED LUMINAIRES

Apliques techo / Ceiling lights

Fluorescentes T26 / T26 fluorescent



T26

	1 x 18 W	685 mm	
AT 18			
AT 18 GM	1 x 18 W	685 mm	
	1 x 36 W	1285 mm	
AT 36			
AT 36 GM	1 x 36 W	1285 mm	
	1 x 58 W	1585 mm	
AT 58			
AT 58 GM	1 x 58 W	1585 mm	






55 mm

Lámparas Compactas / Compact lamps



TC-L

	1 x 36 W	515 mm	
AT 136			
AT 136 GM	1 x 36 W	515 mm	
AT 136 AC	1 x 36 W	515 mm	
	2 x 36 W	985 mm	
AT 236			
AT 236 GM	2 x 36 W	985 mm	
AT 236 AC	2 x 36 W	985 mm	
	3 x 36 W	1575 mm	
AT 336			
AT 336 GM	3 x 36 W	1575 mm	
AT 336 AC	3 x 36 W	1575 mm	



75 / 55 mm

Con equipos electromagnéticos
With electromagnetic gear

[Luminarias de superficie en aluminio, completas con elementos de fijación directa a techo. Difusor policarbonato prismático.

Acabados según referencias en blanco, gris metalizado GM y anocrom AC]

[Aluminium surface-mounted luminaires complete with direct ceiling mounting elements. Polycarbonate prismatic diffuser.

Finished by reference no. in white, metallic grey GM and anocrom AC]